

PA 12 SELF-EXTINGUISHING

Semi-rigid linear tube in blue self-extinguishing PA 12 for industrial compressed air networks.

FEATURES

Semi-rigid linear tube in **self-extinguishing PA 12** alogen-free, UL 94 V2 certified, designed for industrial compressed air networks. **It can be supplied in 4 m piles or straight bars**, for the transposing of air on the production lines, instead of metal pipes. It combines the advantage of **lightness** and the possibility of **cutting it to size** with a simple tube-cutter clasps.

SECTORS

INDUSTRIAL

NORMS AND DECLARATIONS


UL94 V2

APPLICATIONS

VACUUM

MACHINE TOOLS

FLAMMABILITY

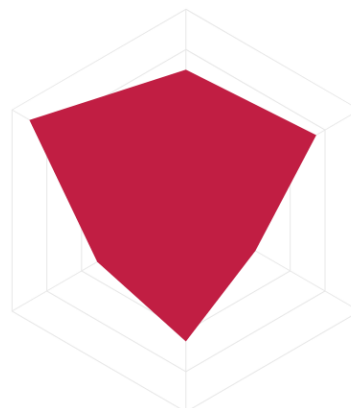

Products

Part number	Inner diameter (iØ)	Outer diameter (oØ)	Wall thickness	Minimum bending radius	Operating pressure (23°C)	STANDA.
TRA2.7X4	2.7 mm	4 mm	0.65 mm	25 mm	34 BAR	A
TRA4X6	4 mm	6 mm	1 mm	35 mm	36 BAR	A
TRA6X8	6 mm	8 mm	1 mm	60 mm	25 BAR	A
TRA8X10	8 mm	10 mm	1 mm	95 mm	20 BAR	A
TRA10X12	10 mm	12 mm	1 mm	135 mm	16 BAR	A
TRA12X15	12 mm	15 mm	1.5 mm	140 mm	20 BAR	A
TRA12.5X15	12.5 mm	15 mm	1.25 mm	170 mm	16 BAR	A
TRA15X18	15 mm	18 mm	1.5 mm	205 mm	16 BAR	A
TRA18X22	18 mm	22 mm	2 mm	225 mm	18 BAR	A
TRA20X24	20 mm	24 mm	2 mm	270 mm	16 BAR	A
TRA24X28	24 mm	28 mm	2 mm	375 mm	13 BAR	A
TRA25X30	25 mm	30 mm	2.5 mm	340 mm	16 BAR	A
TRA34X40	34 mm	40 mm	3 mm	505 mm	14 BAR	A

PRESSURE/TEMPERATURE

Operating temperature: from -30°C to 70°C

Safety factor on working pressure: 3:1

Here on the side: Graph of pressure drop expressed as a % in relation to temperature

