

PA 12 PHL

Tube in bars for loading granules. Excellent abrasion resistance, flexibility and range of diameters covering from the inner Ø 44 mm to 110 mm.

FEATURES

The tubes in this series are produced with plasticized flexible **12 PHL polyamide**, stabilized in light and heat and stored in our warehouses in **6 m straight bars**. Equipped with the **flexibility** characteristic of this material, they also enjoy **excellent resistance to abrasion and aging**. We produce a range of diameters covering from the inner Ø 44 mm to 110 mm.


SECTORS

INDUSTRIAL

FOOD

APPLICATIONS

LOADING RAW MATERIAL GRANULES

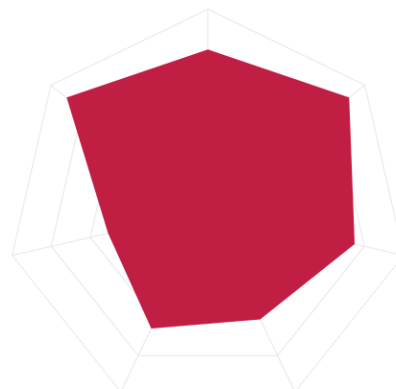

Products

Part number	Diametro int	Diametro est	Spessore	Colori standard	METRI .
12PHL44X51X6	44 mm	51 mm	3.5 mm	(T)	6 m
12PHL50X60X6	50 mm	60 mm	5 mm	(T)	6 m
12PHL53X61X6	53 mm	61 mm	4 mm	(T)	6 m
12PHL55X63X6	55 mm	63 mm	4 mm	(T)	6 m
12PHL60X70X6	60 mm	70 mm	5 mm	(T)	6 m
12PHL62X70X6	62 mm	70 mm	4 mm	(T)	6 m
12PHL70X80X6	70 mm	80 mm	5 mm	(T)	6 m
12PHL72X80X6	72 mm	80 mm	4 mm	(T)	6 m
12PHL80X90X6	80 mm	90 mm	5 mm	(T)	6 m
12PHL90X100X6	90 mm	100 mm	5 mm	(T)	6 m

PRESSURE/TEMPERATURE

Operating temperature: from -40°C to 80°C

Safety factor on working pressure: 3:1

Here on the side: Graph of pressure drop expressed as a % in relation to temperature

