

PEROXIDE SILICONE

Extruded silicone tube in neutral color and 60 ShA hardness. Catalyzed peroxide, particularly suitable for the passage of aggressive fluids.

FEATURES

Extruded silicone tube in neutral color and 60 ShA hardness. Catalyzed peroxide, particularly suitable for the passage of aggressive fluids.

It benefits from:

- low coefficient of friction;
- good transparency;
- reduced yellowing over time;
- odorless;
- non-toxic;
- excellent resistance to high and low temperatures.

NOT SUITABLE FOR VEGETABLE OILS.

SECTORS

INDUSTRIAL

FOOD

NORMS AND DECLARATIONS

CE REG. 1935/2004

D.M. 21/03/73

FDA TITLE 21 CFR 177.2600


APPLICATIONS

DRINKABLE WATER

AIR SHAFTS

COMPRESSED AIR LINE

FOOD CONTACT

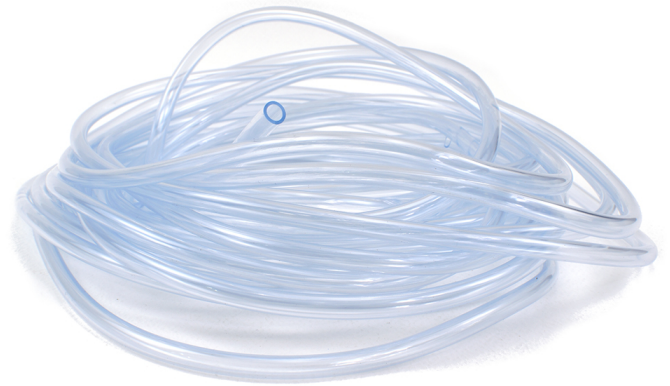

ADDITIONAL INFO
PRODUCT

	External Ø (mm)	Internal Ø (mm)	Bulk (gr/m)
TS2X4	4	2	12
TS3X5	5	3	16
TS3X6	6	3	27
TS4X6	6	4	20
TS4X8	8	4	48
TS5X8	8	5	39
TS5X9	9	5	56
TS6X9	9	6	45
TS6X10	10	6	64
TS7X10	10	7	51
TS8X10	10	8	36
TS8X12	12	8	80
TS9X12	12	9	63
TS10X12	12	10	44
TS10X14	14	10	96
TS12X16	16	12	112
TS14X18	18	14	126
TS18X24	24	18	253

DIMENSIONAL TOLERANCES

 Tolleranze sulle dimensioni della sezione trasversale di prodotti estrusi liberi secondo **UNI ISO 3302**

Nominal size	CLASS E2 (+-)
From 0 to 1.5	0.25
From 1.5 to 2.5	0.35
From 2.5 to 4.0	0.40
From 4.0 to 6.3	0.50
From 6.3 to 10.0	0.70
From 10 to 16	0.80
From 16 to 25	1.00
From 25 to 40	1.30
From 40 to 63	1.60

From 63 to 100

2.00

> 100

5%